


2015+ SRT8 / HELLCAT Aluminum and Carbon Fiber

1-Piece CV Driveshaft

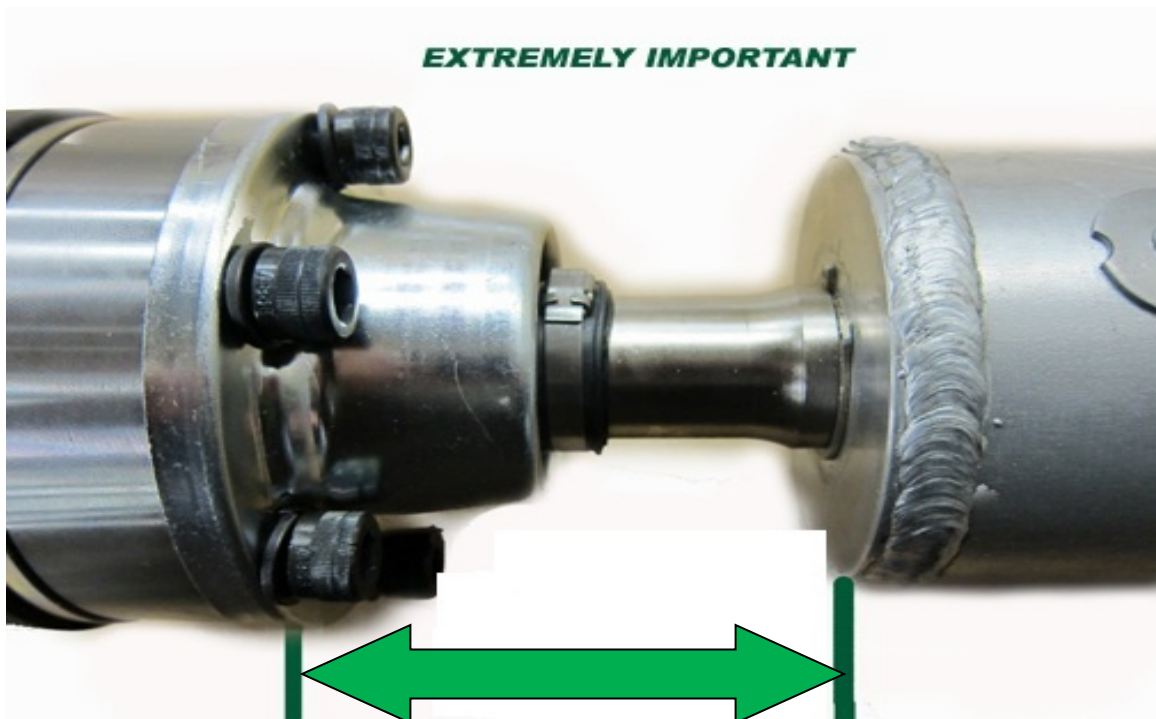

Driveshaft CV Clearance **Must BE CHECKED** after installation.
If dimension is not within the allowed range, do not run the driveshaft

Charger SRT8 / Hellcat <u>Automatic</u>	(CHSH11-xxx / CHSH12-xxx)	Must be between <u>3.25" – 3.75"</u>
Challenger SRT8 / Hellcat <u>Automatic</u>	(CHSH17-xxx / CHSH18-xxx)	Must be between <u>3.25" – 3.75"</u>
Challenger SRT8 / Hellcat <u>Manual</u>	(CHSH15- xxx)	Must be between <u>5.25" – 5.75"</u>

Adapter plate Hardware Torque:

(4) M12 Bolts 70 ft-lbs torque / (20) M10 Bolts use 57 ft-lbs torque

DIFFERENTIAL AND TRANSMISSION SPACERS are not required for 2015+

PLEASE NOTE: Exhaust system may need to be modified for adequate clearance (.75")